

Flachl fter  
Ultra Slim Fans  
Ventilateur Ultra Plats



SN EN ISO 9001 CERTIFICATED


F16LM-9

3 VDC







U16LM-9



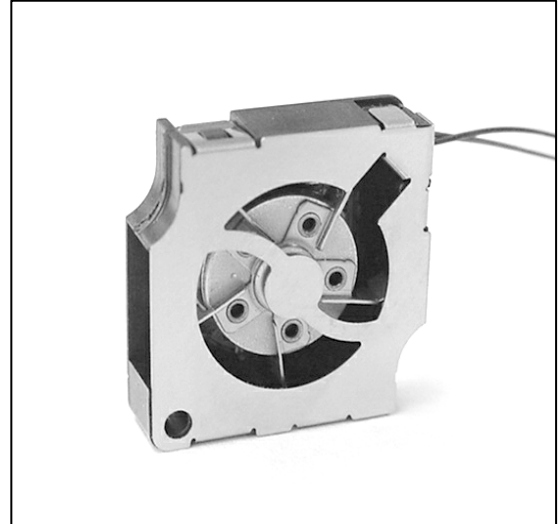



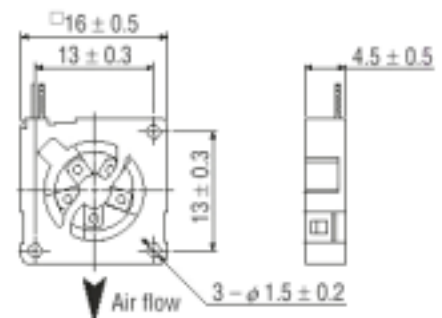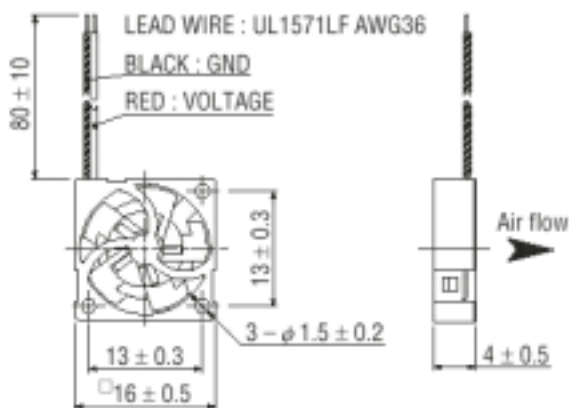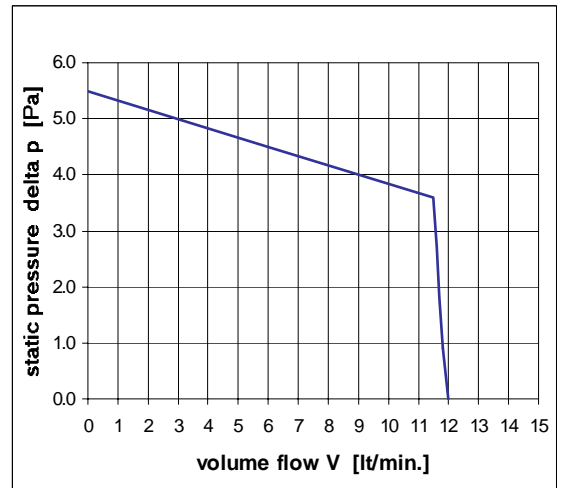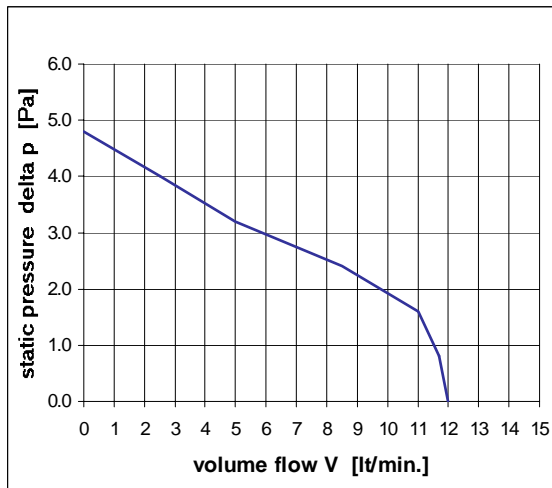













5 VDC



F16 / U16



**Technische Daten**
**F16 = miniatur Flachlüfter**  
**U16 = miniature radial Lüfter**
**Technical data**
**F16 = ultra small axial fan**  
**U16 = ultra small radial blower**
**Carateristiques techniques**
**F16 = ventilateur axial ultra plat**  
**U16 = ventilateur radial ultra plat**

			F16LM	U16LM
	U <sub>N</sub>	V	3	5
	U	V	3.3 – 3.5	4.5 – 5.5
	I <sub>max</sub>	mA	20	40
	I <sub>block</sub>	mA	0	
	P <sub>N</sub>	W	0.07	0.2
	n	min <sup>-1</sup>	6500	6000
	V	l/min	12	12
	p	Pa	4.7	5.5
	LpA	db(A)	3	3
	MTTF	hr	10'000 / 25°C	
	T	°C/°F	0...+60 / 32...+140	
	m	gr/oz	1.3 / 0.06	
	M	mm/inch	80/3.15 (AWG36)	
	PC		SUS, LCP reinforced (UL94V-0)	
	sleeve bearing		O	
	ball bearing		-	
	Option/Tacho/NOS		-	
	Attachment		-	
	Attachment		-	
	Attachment		-	