

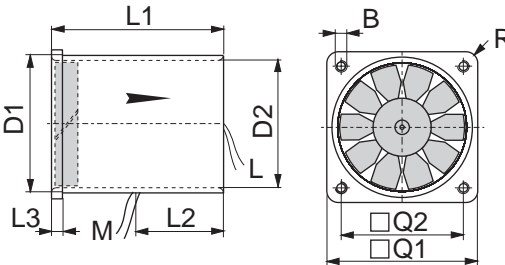

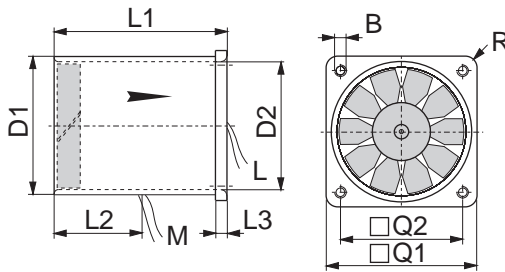



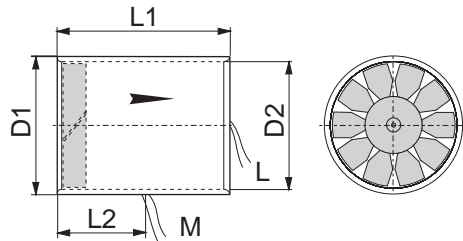


**Axiallüfter**  
**Axial Fans**  
**Ventilateurs Axial**




**D301, D303, D304**

**12 VDC**

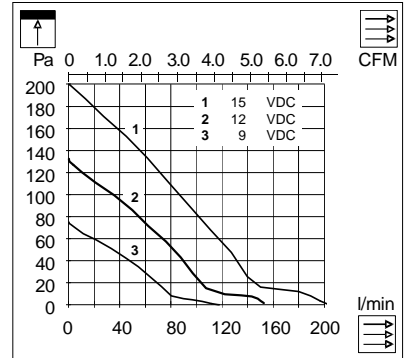





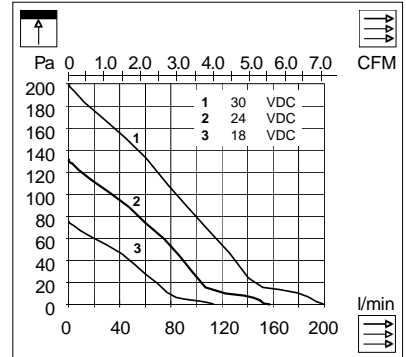




















**D301, D303, D304**

**24 VDC**



D300	mm	inch
D1	30	1.181
D2	27.5	1.083
L1	36	1.417
L2	18	0.709
L3	3	0.118
B	2.6	0.102
Q1	34	1.338
Q2	28	1.102
R	3	0.118



Types -1  -3  -4 			D301/D303/D304	
 U <sub>N</sub>	V		<b>12</b>	<b>24</b>
 U	V		9...15	18...30
 I <sub>N</sub>	mA		48	22
 I <sub>max</sub>	mA		60	27
 I <sub>block</sub>	A		0.9	0.45
 P <sub>N</sub>	W		0.58	0.53
 n	min <sup>-1</sup>		13 750	13 750
 $\dot{V}$	l/min; CFM		146/5.16	146/5.16
 p	Pa		130	130
 LpA	dB(A)		42	42
 MTTF	hr		5000	
 T	°C/F		-20...+65 / -5...+150	
 m	g/oz.		32/1.13	
 L/M	mm/inch		210/8.268	
 PPO	UL-94V-1		o.k.	
 Aluminium			-	
			o.k.	
			-	
 CLL			option	
			-	
			-	
			-	

