


92x92x38mm
DC Speed 12V, 24V, 48V




General Specifications

- Material..... Frame: Plastic (UL94V-0)
Impeller: Plastic (UL94V-0)
Lead Wire: UL1007AWG#24 or Equivalent (+)Red, (-)Black
- Expected Life..... Ball Bearing 50.000hrs (40°C)
- Temperature Range.. Operating temperature -10°C~+70°C (Non-condensing)
Storage temperature -40°C~+70°C (Non-condensing)


Dimensions (Unit: mm)

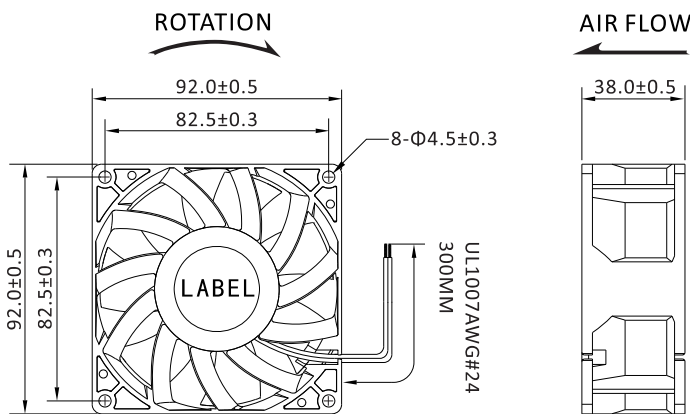

PQ Curve (At Rated Voltage)

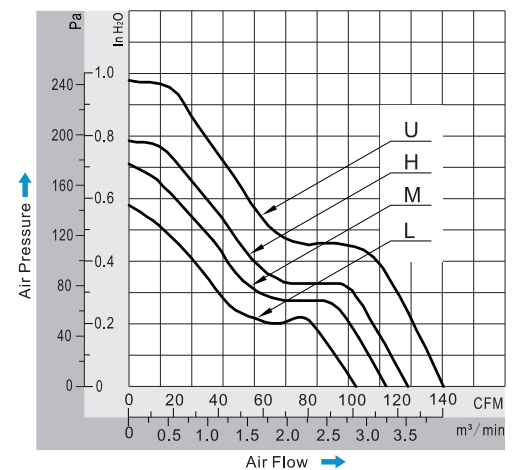

Mounting Panel Cutout (Unit: mm)

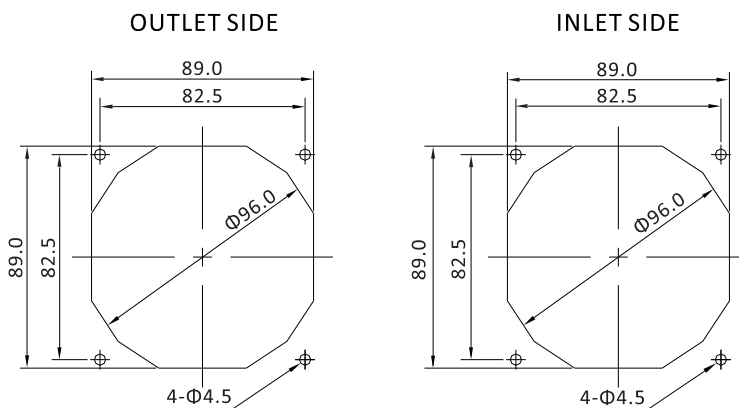

Safety Standards



DC Fans Specials



Specifications

Model	Bearing Type	Rated Voltage	Operating Voltage	Rated Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	B/S	VDC	VDC	Amp	Watt	RPM	CFM	m³/min	Inch-H2O	PA	dB-A	g
DZ09238#12U	B	12	7,0~13,8	2,50	30,00	6000	139,87	3,958	0,96	239	61.0	166.0
DZ09238#12H	B	12	7,0~13,8	1,80	21,60	5500	124,56	3,525	0,79	197	56.0	166.0
DZ09238#12M	B	12	7,0~13,8	1,20	14,40	5000	115,09	3,257	0,71	177	50.0	166.0
DZ09238#12L	B	12	7,0~13,8	0,90	10,80	4500	102,73	2,907	0,58	144	45.0	166.0
DZ09238#24U	B	24	14,0~27,6	1,50	36,00	6000	139,87	3,958	0,96	239	61.0	166.0
DZ09238#24H	B	24	14,0~27,6	1,00	24,00	5500	124,56	3,525	0,79	197	56.0	166.0
DZ09238#24M	B	24	14,0~27,6	0,80	19,20	5000	115,09	3,257	0,71	177	50.0	166.0
DZ09238#24L	B	24	14,0~27,6	0,60	14,40	4500	102,73	2,907	0,58	144	45.0	166.0
DZ09238#48U	B	48	28,0~56,0	0,80	38,40	6000	139,87	3,958	0,96	239	61.0	166.0
DZ09238#48H	B	48	28,0~56,0	0,60	28,80	5500	124,56	3,525	0,79	197	56.0	166.0
DZ09238#48M	B	48	28,0~56,0	0,40	19,20	5000	115,09	3,257	0,71	177	50.0	166.0
DZ09238#48L	B	48	28,0~56,0	0,30	14,40	4500	102,73	2,907	0,58	144	45.0	166.0

DA09238Z DC Fan